







Color Correction Series

Kupo Color Correction Filters are used in applications where it is desirable to change color temperature of various light sources. These subtle and less saturated tones are ideal for Film, Movie, Photo Schemes. Better than gels!

Tungsten Conversion

	Full C.T.B. Converts 3200°K sources to daylight
	Half C.T.B. Converts 3200°K sources to 4200°K
	Quarter C.T.B. Converts 3200°K sources to 3600°K

Daylight Conversion

	Full C.T.O. Converts 5500°K sources to 3200°K
	Half C.T.O. Converts 5500°K sources to 3800°K
	Quarter C.T.O. Converts 5500°K sources to 4500°K

Now we have a full series of CTO/CTB for ARRI Lighting.


- * Glass Materials: Borofloat Glass
- * Maximum Operation Temperature: 450 Degree C
- * Cutting Tolerance : +/-0.1mm
- * Thickness: 3.3mm
- * Color Tolerance: +/-5nm of designed half height
- * All filters come with the Metal Frame.
(Bigger filter will have the protected net.)



Frame Net For Better Protection.
Big Size Only!


CTB Tungsten Conversion:

- KCTB-001** For ARRI Junior 300W
- KCTB-002** For ARRI Junior 650W
- KCTB-003** For ARRI Junior 1000W / Studio 1000W
- KCTB-004** For ARRI Junior 2000W

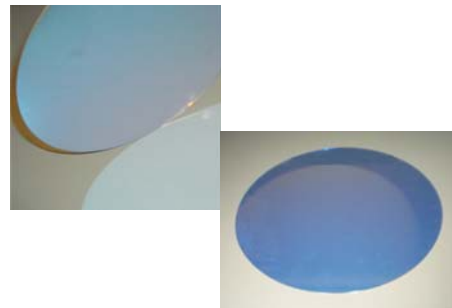

CTO Daylight Conversion:

- KCTO-001** For ARRI Compact 125W
- KCTO-002** For ARRI Compact 200W/ Par 200W
- KCTO-003** For ARRI Compact 575W / Par 575W
- KCTO-004** For ARRI Compact 1200W

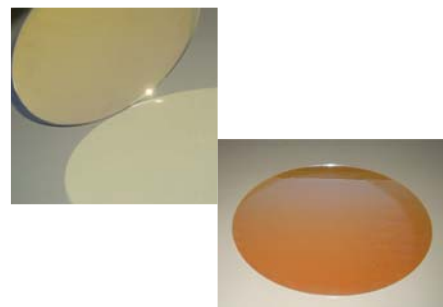

Custom Designs Welcome!

KCP-347 Wooden type C47 clothespin,

Wooden spring-type clothespin also called C47 is used to attach gels and diffusion to lighting fixtures and bran doors without heat transmission from the hot light. Also ideal for drying film and printing in the darkroom use as clips (50PCS per bag).


KCP-347



Package



Application



Honeycomb



Honeycomb is made up of the aluminum foil with a hexagon shape. It can be a shield to prevent the dazzle of illuminators.

Features:

- Dazzle prevention
- Light weight
- Control the light path

Quality approval:

- RoHS certification
- The consistency of painting coating
- No painting fading under UV illumination
- With 250 degree C heat resistance

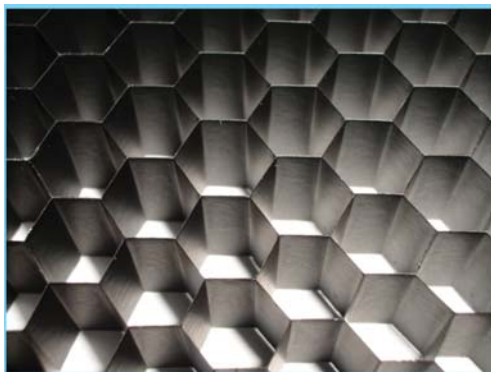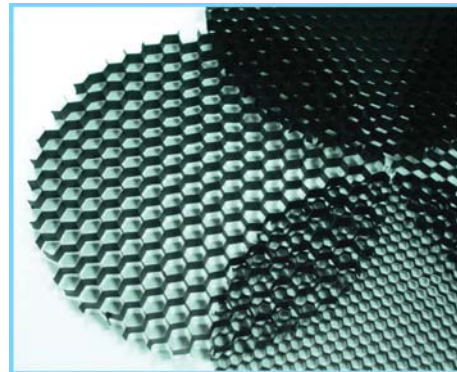

Specification:

- Material : Aluminum foil
- Color: Black , Silve
- Available size
- Square : 30mm - 300mm
- Round: 30mm - 300mm
- Available Thickness (Height)
- 3mm - 15mm
- Aperture Size:
- (1) 1/8" : 3.18mm
- (Available thickness: 3 - 5mm)
- (2) 3/16" : 4.76mm
- (3) 1/4" : 6.35mm

Honeycomb with frame

Kupo is a professional manufactory.
We are very good at the hardware producing.
The Honeycomb can come with any kinds of frame you need by OEM base!



Custom Designs Welcome!